



## GM-FLOW02-UE-XX

### MICROPROCESSOR MODULE

for **MEASUREMENT, VISUALIZATION, and RECORDING**

[using dedicated outputs for recording data in our software] of air flow rates, air speed in piping, differential pressure, and fluid temperature if the meter is equipped with temperature probe GMSTN415D-EX or GMSTN425D-EX, **consisting of the microprocessor module and pitot tube with the length indicated by the final number in the code [measurement in inches] and fixing flange.**

Air flow data shown at the centre of the display.

Alternating display of air speed (greater than 2 m/s) and differential pressure data.

Visualization of detected temperature data [if the temperature probe is present] or the value set by the user [default 25°C].

**Display:** backlit, 128 x 64 pixels.

**Inputs:** • analog 4-20mA

• pressure

**Output:** • analog 4-20mA

• analog 0-10V

• RS485 serial line.

• digital on two relays, fully customized using internal software.

**Output 24Vdc - 200mA to power external devices.**

**Output with MINI-USB on the front of the instrument**

[software to download data]

**Output with RJ45 Ethernet socket on the side of the instrument**

[data-recording software optional]

**2-MB memory in the instrument for data recording with date and time**

**Power 1:** from 85 to 264Vac [from 47 to 440 Hz]

or from 127 to 370Vdc.

**Power 2:** 24Vdc ± 10%

**Both power supplies are included standard.**

Working temperature: -20°C - +60°C

**Protection:** IP54

For correct installation, the pitot tube must be situated at the centre of the pipe where it is installed. The table also shows the length of the pitot tube.

**The container should be attached at a maximum of 8 linear metres from the pitot tube.**

#### CODE

#### LENGTH mm PITOT TUBE

**GM-FLOW02-UE-12**

304.80

**GM-FLOW02-UE-18**

457.20

**GM-FLOW02-UE-24**

609.60

**GM-FLOW02-UE-36**

914.40

**GM-FLOW02-UE-48**


1219.20

**GM-FLOW02-UE-60**

1524.00



#### DIMENSIONS:

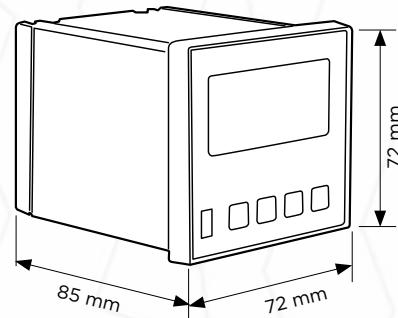

## TECHNICAL SPECIFICATIONS

## Technology.

Microprocessor electronics with flash memory.

## Input power:

## Power 1

May be applied regardless of the voltage from 85 to 264 VAC and frequency from 47 to 440 Hz, or any continuous voltage from 127 to 370 VDC.

## Power 2

Power 24 VDC  $\pm$  10%

## Protection against:

overheating, overloads, voltage surges and short circuits with automatic recovery.

## Absorbed power.

&lt; 6 W

## Analogue current input

(Activated using software).

4-20 mA active. Temperature compensation

with **GMSTN415D** or **GMSTN425D**

4-20 mA passive (e.g. two-wire transmitter)

## Pressure input

(Activated using software).

Absolute and differential pressure with on-board sensor (0-100 mmH<sub>2</sub>O standard).

## Air speed in the tube

Greater than 2 m/s

## Analogue current output

(Activated using software).

4-2mA active (current generator).

4-20 mA passive (current load).

## Analogue voltage output

(Activated using software).

0-10V

## Resistance of current inputs 4-20 mA

< 50  $\Omega$ 

## Resistance of voltage inputs 0-10 V

>5000  $\Omega$ 

## Resistance load on 4-20 mA outputs

< 750  $\Omega$ 

## Resistance load on 0-10 V output.

> 10000  $\Omega$ 

## Input/output protection.

All analogue/digital inputs and outputs are protected with resettable fuses, Zener diodes and varistors.

## Type of digital output.

Two-wire RS485 protected with resettable fuses.

## Output to power external devices.

24 VDC  $\pm$  5% maximum current for external uses = 200 mA.

## Number of thresholds.

2

## Threshold output.

Two relays with 250 VAC/30 VDC 5 A contacts.

## Threshold type.

Entirely software programmable.

## Visualization

Graphical display 128 x 64 pixels with LED back-lighting.

Two green LEDs for the relay threshold status

## Precision.

 $\pm$  0.1% F.S.

## Working temperature/humidity.

Temperature from -20°C to +60°C.

Humidity from 0% to 90%, non-condensing.

## Input buttons.

Four buttons for entering data.

## Electrical connection:

- One removable 6-pole terminal, 5.08 mm step (2 relay outputs with switch contacts).
- One removable 2-pole terminal, 7.62 mm step (Only Power 1)
- One removable 9-pole terminal, 5.08 mm step (Power 2, digital inputs, outputs, analog outputs, RS485).

## Interfaces

1 USB + 1 Ethernet

## Pneumatic connection

Two hose connectors for  $\varnothing$  4 mm hoses.

## Protection rating

IP54 front

## Container

Recessed container 72 mm x 72 mm

Hole dimensions 68 mm x 68 mm. DIN 43700.

## Container material

Self-extinguishing UL 94 VO.

## Certifications

CE

## ACCESSORIES:

**GM-CT2-P01S-RJ**

Polycarbonate container for microprocessor module equipped with RJ45 port for remote connection  
GM-FLOW02-UE-xx

**GMSTN415D-EX**  
**GMSTN425D-EX**

Temperature transducer

**GM-SW4-002-x**

SOFTWARE to manage and record data measured and transmitted using microprocessor module code GM-FLOW02-UE-xx