



GMTEST4-EX

FOURTH-GENERATION TEST LAMP

for GMSC243TH-EX spark detectors

Complies with **ATEX Directive 2014/34/EU**

Category 3D/3G

Die-cast aluminium enclosure painted RAL 3000
dimensions: L x H x D = 123 mm x 68 mm x 78mm

Operating temperature: -30°C - +65°C

Power: 24Vdc - absorption: 200-250mA

Protection: IP65



GMTEST4-EX-FM

FOURTH-GENERATION TEST LAMP

for GMSC243TH-EX-FM spark detectors

FM APPROVED Certified

Complies with **ATEX Directive 2014/34/EU**

Category 3D/3G

Die-cast aluminium enclosure painted RAL 3000
dimensions: L x H x D = 123 mm x 68 mm x 78mm


Operating temperature: -30°C - +65°C

Power: 24Vdc - absorption: 200-250mA

Protection: IP65



DIMENSIONS:

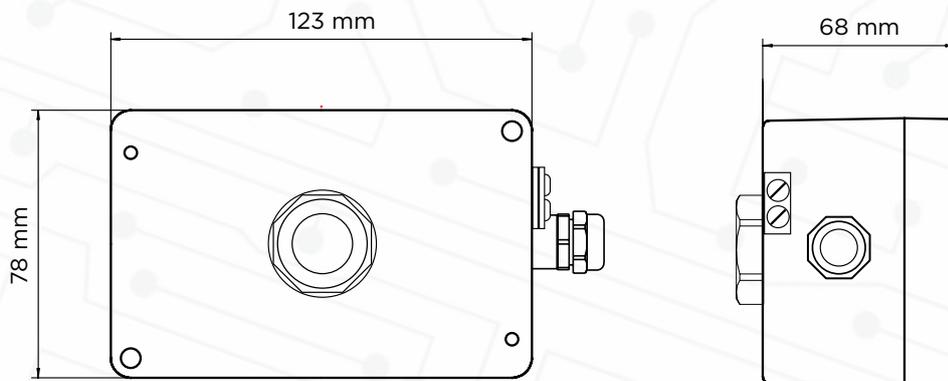

ACCESSORIES:



GMSUP2-EX-TU
GMSUP2-EX-TU-FM




GM-G10-008

Steel ring for
cleaning the
porthole support.


Fire Prevention: TEST LAMP

EXAMPLE OF SPARK DETECTION TEST

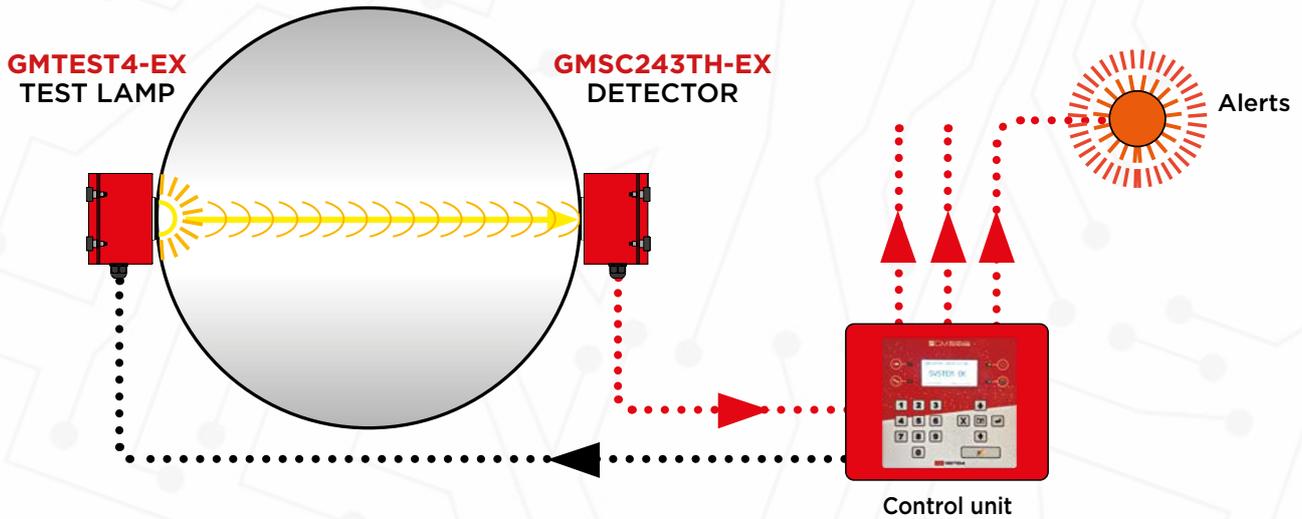


INSTALLATION OF TEST LAMP AND SPARK DETECTORS ON PIPES:


GREATER THAN 1000 mm

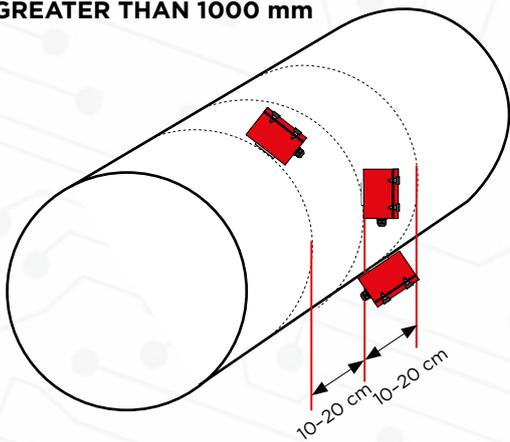


UP TO 1000 mm

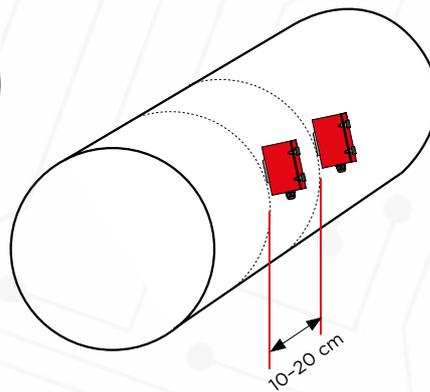

UP TO 500 mm

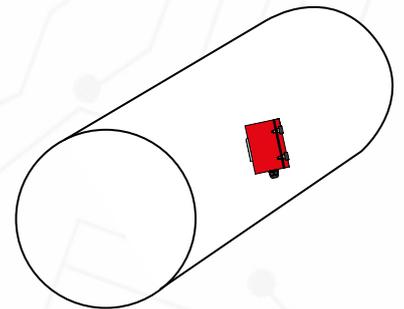

FRONT VIEW

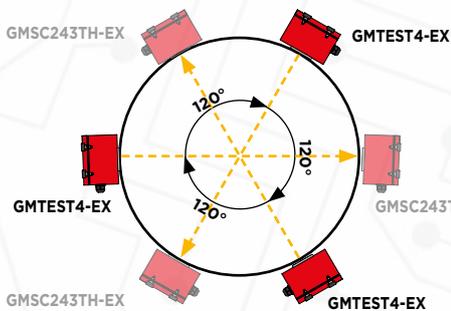

FRONT VIEW



FRONT VIEW

