



GMTEST5D-FM

FIFTH-GENERATION TEST LAMP

FM APPROVED Certified

for GMSC245D-FM spark detectors

Complies with **ATEX Directive 2014/34/EU**

Category 3D/3G

Die-cast aluminium enclosure painted RAL 3000

Dimensions: DIN A


Working temperature: -30°C - +65°C

Power: 24Vdc - absorption: 200-250mA

Protection: IP65



DIMENSIONS:

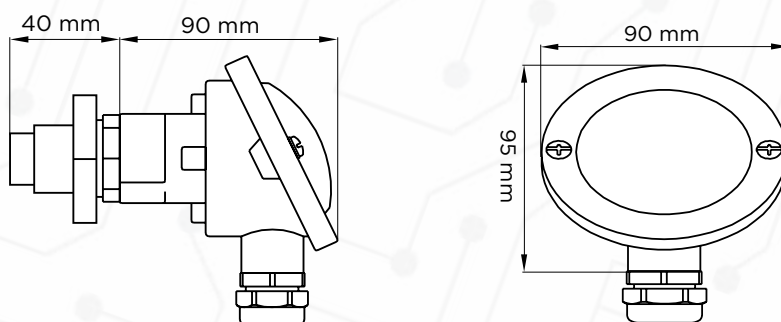

ACCESSORIES:


GMSUP5D-B2




GMSUP5D-OPT

Non-invasive
suitable for pipes a diameter
greater than 150 mm and a
thickness less than 1.9 mm
Including inspection window
component GMSUP5D-B2

INSTALLATION WITH SYSTEM GMSUP5D-OPT

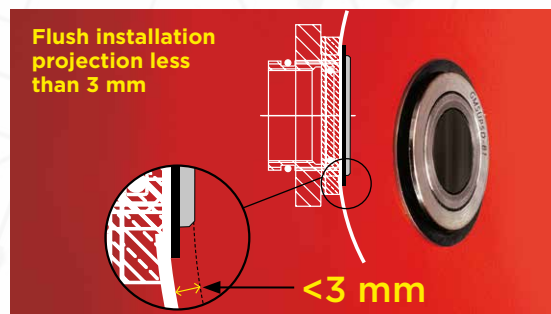


EXAMPLE OF SPARK DETECTION TEST

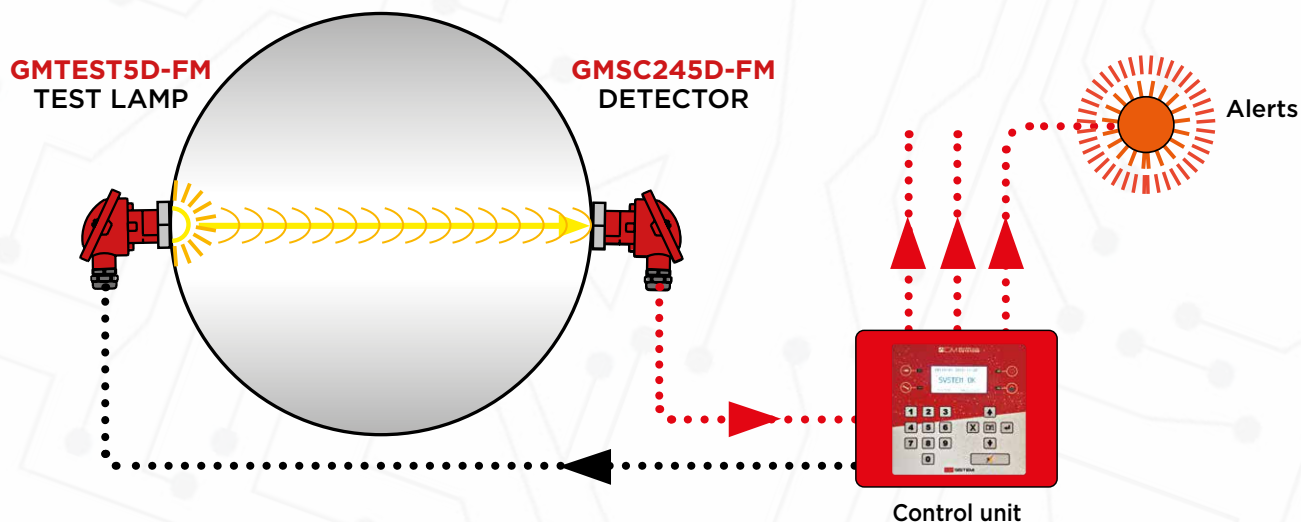


INSTALLATION OF TEST LAMP AND SPARK DETECTORS ON DUCTS:


MORE THAN 1000 mm

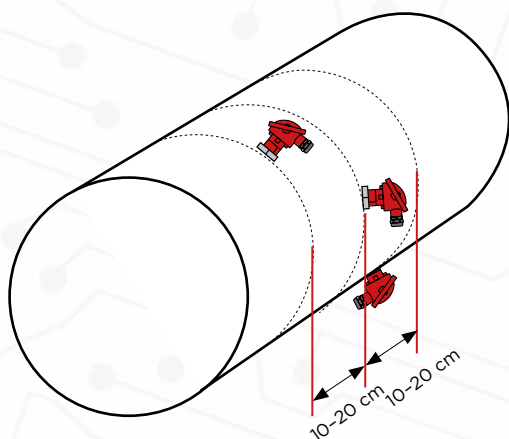


FRONT VIEW

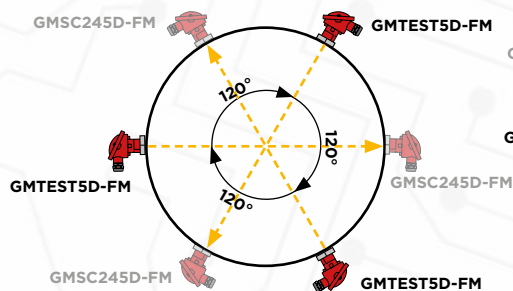


UP TO 1000 mm

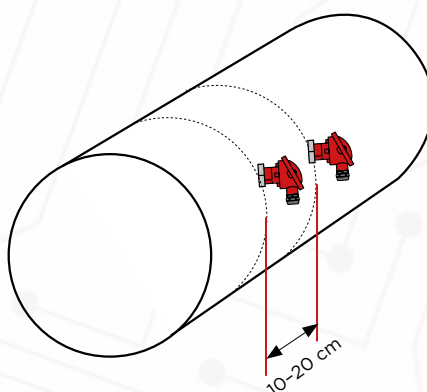

FRONT VIEW

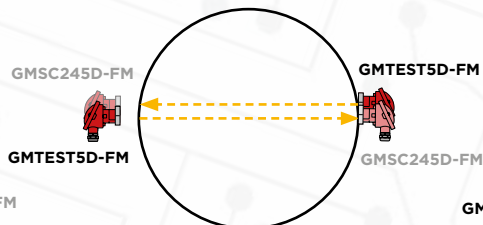

UP TO 500 mm

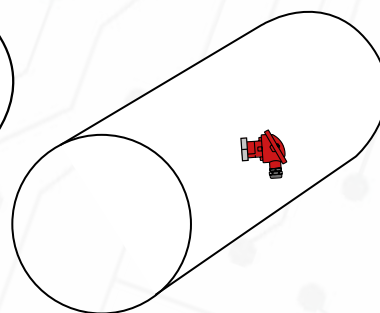

FRONT VIEW

