



**GMUGS-CVO-12-FM - SPRAY NOZZLE**  
**WITH SHUTTER - 120° CONE STREAM - FLOW RATE 0.8 L/s**


3/4" joint - minimum pressure 3.5 bar

**Suitable** for installation on ducts with the new non-invasive attachment system [code *GMSUP5D*]

**Suitable** for connection to rubber tubes [code *GMTG34-xxx*]

[code *GMTG34-xxx*]

**FM APPROVED Certified**

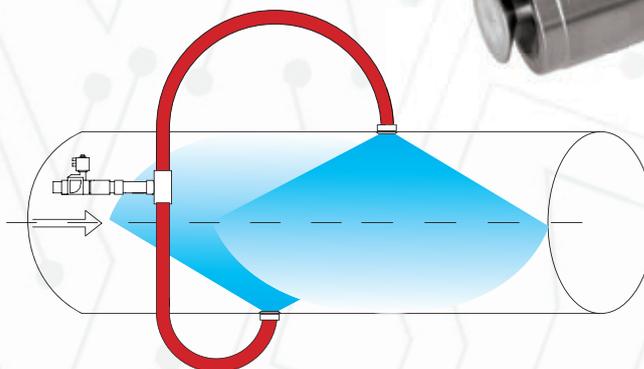

**GMUGS-CVO-M-IX - SPRAY NOZZLE**  
**WITH SHUTTER - 120° CONE STREAM - FLOW RATE 0.8 L/s**

3/4" joint - minimum pressure 3.5 bar

**Suitable** for installation on conduits with the attachment flange [code *GMUGS-CVO-S1*].

**CANNOT** be connected to rubber tubes

[code *GMTG34-xxx*]

**GMUGS-CVO-M-IX-FM - SPRAY NOZZLE**  
**WITH SHUTTER - 120° CONE STREAM - FLOW RATE 0.8 L/s**


3/4" joint - minimum pressure 3.5 bar

**Suitable** for installation on conduits with attachment flange [code *GMUGS-CVO-S1*].

**CANNOT** be connected to rubber tubes

[code *GMTG34-xxx*]

**FM APPROVED Certified**

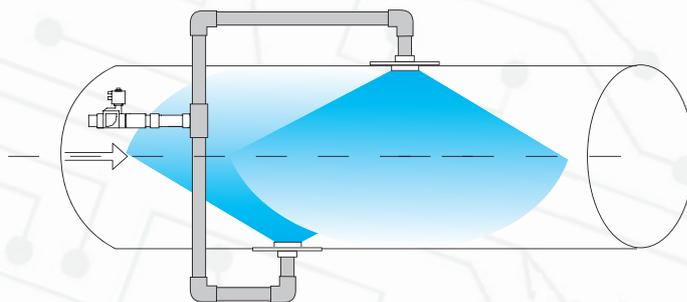

**ACCESSORIES:**



**GMTG34-xx**

Pair of red rubber tubes  
**FM APPROVED Certified**  
 for connection to spray nozzles  
*GMUGS-CVO-12-FM*



**GMSUP5D**

Non-invasive attachment system specifically for spray nozzle  
*GMUGS-CVO-12-FM*  
**FM APPROVED Certified - TÜV Certified**



**GMUGS-CVO-S1**


Attachment flange only  
 for nozzles *GMUGS-CVO-M-IX*

**GMUGS34 - WATER SPRAY NOZZLE**

120° FAN-SHAPED JET

¾" joint

**NOT** supplied with attachment system

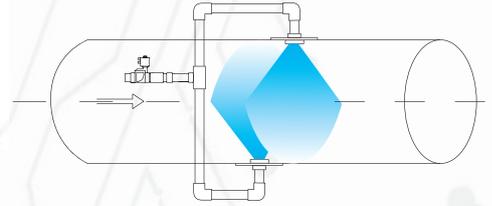


**GMUGHS120 - WATER SPRAY NOZZLE**

120° CONICAL JET

¾" joint

Installed within the duct.

**NOT** supplied with attachment system

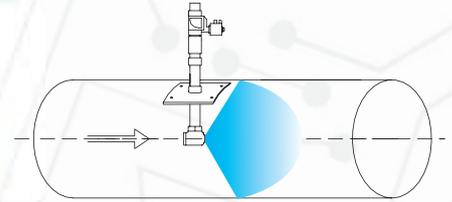

**GMELV24-EX - SOLENOID VALVE - ¾" joint**

FOR WATER 2-WAY NC

Complies with ATEX Directive 2014/34/EU - Category 2D/2G

Comes complete with coil and connector



**GMELV24-1P-EX - SOLENOID VALVE - 1" joint**

FOR WATER 2-WAY NC

Complies with ATEX Directive 2014/34/EU - Category 2D/2G

Comes complete with coil and connector



**GMELV24-12P-EX - SOLENOID VALVE - 1-1/2" joint**

FOR WATER 2-WAY NC

Complies with ATEX Directive 2014/34/EU - Category 2D/2G

Comes complete with coil and connector



**GMELV24-2P-EX - SOLENOID VALVE - 2" joint**

FOR WATER 2-WAY NC

Complies with ATEX Directive 2014/34/EU - Category 2D/2G

Comes complete with coil and connector

