



### GMUGS-CVO-I2-FM – SPRAY NOZZLE

WITH SHUTTER – 120° CONE STREAM – FLOW RATE 0.8 L/s


¾" joint – minimum pressure 3.5 bar

**Suitable** for installation on ducts with the new

non-invasive mounting kit [code GMSUP5D]

**Suitable** for connection to rubber tubes GMTG34-xxx

**FM APPROVED** Certified

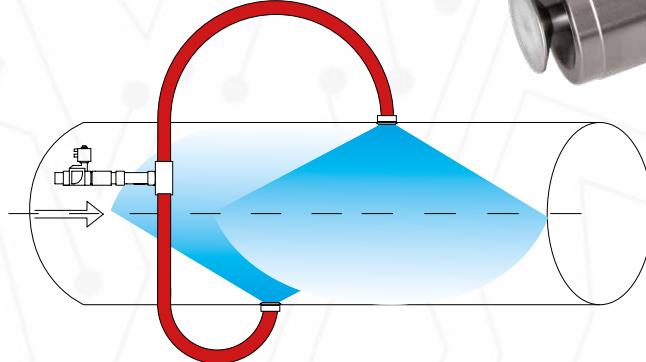

### GMUGS-CVO-M-IX

### GMUGS-CVO-M-IX-FM



### SPRAY NOZZLE

WITH SHUTTER – 120° CONE STREAM – FLOW RATE 0.8 L/s

¾" joint – minimum pressure 3.5 bar

**Suitable** for installation on conduits with the mounting kit

[code GMUGS-CVO-S1].

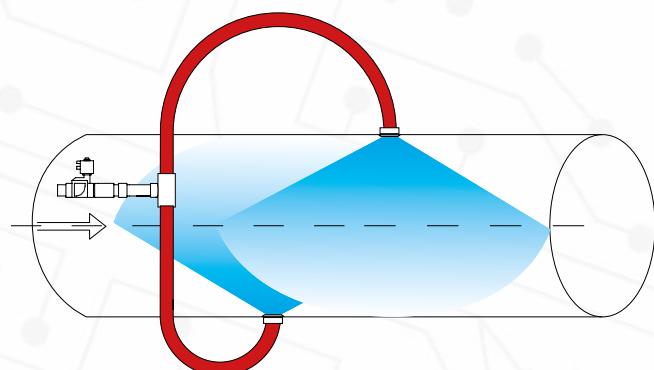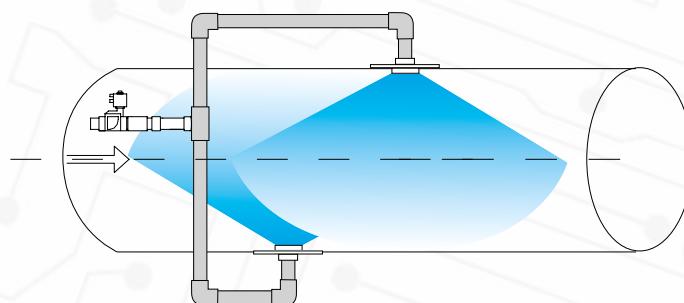

#### ACCESSORIES:



#### GMTG34-XX

Pair of red rubber tubes

**FM APPROVED** Certified

for connection to spray nozzles

GMUGS-CVO-I2-FM



#### GMSUP5D

Non-invasive mounting kit  
specifically for spray nozzle

GMUGS-CVO-I2-FM

**FM APPROVED** Certified – TÜV Certified



#### GMUGS-CVO-S1


Mounting kit only  
for nozzles GMUGS-CVO-M-IX

**GMUGS34 - WATER SPRAY NOZZLE**

120° FAN-SHAPED JET

¾" joint

NOT supplied with mounting kit

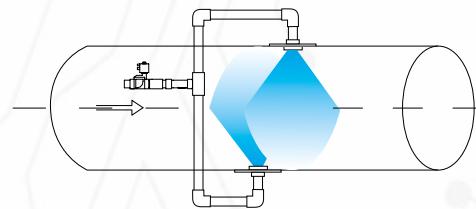**GMELV24-EX - SOLENOID VALVE - ¾" joint**

FOR WATER 2-WAY NC

Complies with ATEX Directive 2014/34/EU - Category 2D/2G

Comes with coil and connector

**GMELV24-1P-EX - SOLENOID VALVE - 1" joint**

FOR WATER 2-WAY NC

Complies with ATEX Directive 2014/34/EU - Category 2D/2G

Comes with coil and connector

**GMELV24-12P-EX - SOLENOID VALVE - 1-1/2" joint**

FOR WATER 2-WAY NC

Complies with ATEX Directive 2014/34/EU - Category 2D/2G

Comes with coil and connector

**GMELV24-2P-EX - SOLENOID VALVE - 2" joint**

FOR WATER 2-WAY NC

Complies with ATEX Directive 2014/34/EU - Category 2D/2G

Comes with coil and connector

